


Strip Joiner, Different Punch Options


The Behlen strip joiner is a completely self contained system and requires only to be fastened securely in place and attached to a proper electrical supply. These stitching machines are available in sizes from 12 inch through 114 inch. Joining is accomplished by 1 of 3 different punch designs.

The first of these available punches is the standard WRSJ shown here.

STANDARD WRSJ

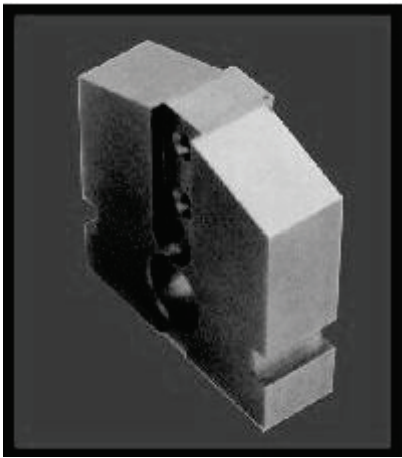

This standard WRSJ punch produces a stitch which after slip locking looks like this.

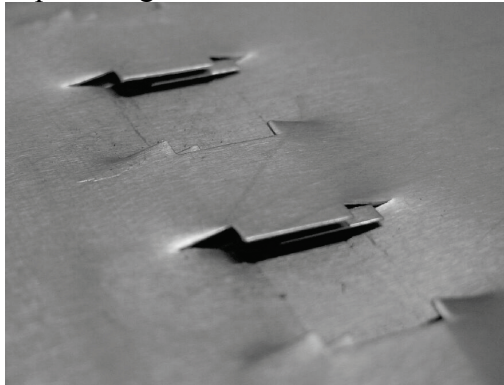


The second available punch is the standard APSJ shown here.

STANDARD APSJ




This standard APSJ punch produces a stitch which after slip locking looks like this.

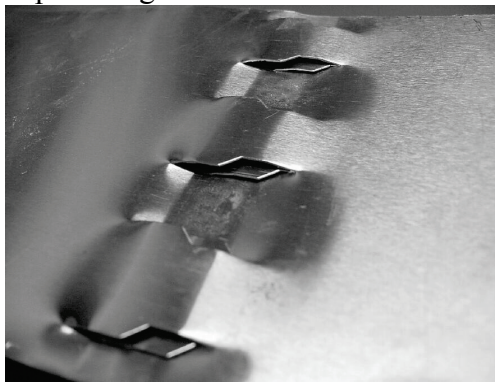


The standard APSJ has twice as many locking tabs as the standard WRSJ and produces a much stronger joint.

The third available punch is the standard SS (straight side) shown here.

STANDARD SS

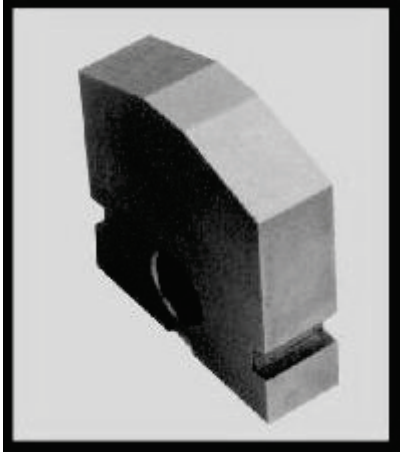

This standard SS punch is used when the customer wants to insert a locking needle as shown here.

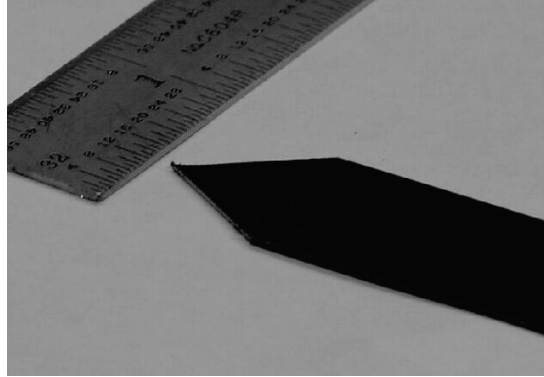

The standard SS is best for the heavier materials and in a production line where adequate time is available for insertion of the needle.

Note: A needle can also be inserted in APSJ and WRSJ style of joint.

Here are some pictures of needle inserted in WRSJ style of joints.

